


ML280 ELITE DOT MATRIX PRINTER

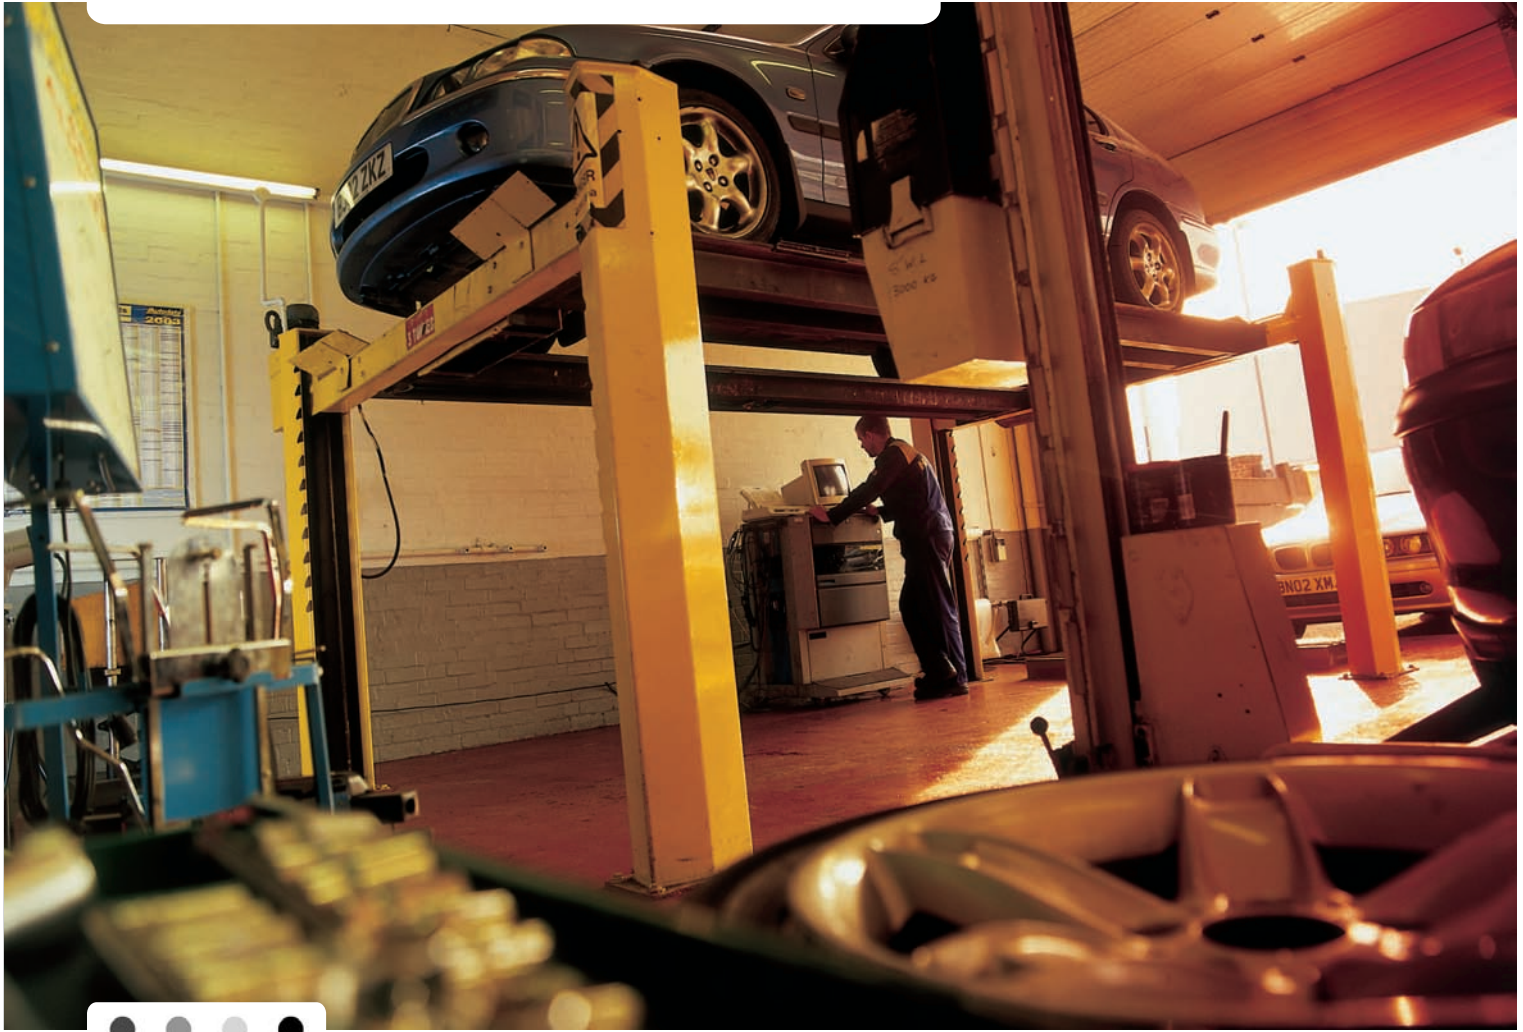

❖❖❖ ML280 ELITE

❖❖❖ 9-PIN DOT MATRIX PRINTER

THE RELIABLE AND AFFORDABLE PRINTER FOR INDUSTRIAL AND POINT OF SALE APPLICATIONS

The new Microline 280 Elite has been greatly improved from its popular predecessor, the Microline 280. Not only does the Microline 280 Elite have faster print speeds; 333 cps in high speed draft mode at 10cpi, it also offers greater flexibility, supporting a host of emulations, USB as standard and is ideal for continuous data processing. High reliability and very compact dimensions make it especially suited for front/back office applications and industrial environments (multipart forms, labels etc.)

MAIN FEATURES OF THE ML280 ELITE PRINTER

- ❖❖❖ Fast and durable Oki 9 pin narrow carriage impact printer
- ❖❖❖ Oki's unique, high durability 9-pin print head
- ❖❖❖ Handles up to 4 part forms (original + 3 copies)
- ❖❖❖ Fast 333 characters per second (10cpi high speed draft)
- ❖❖❖ Versatile top, bottom and rear paper feed
- ❖❖❖ Parallel/USB as standard, serial version also available



OKI

ML280 ELITE DOT MATRIX PRINTER

PRODUCT SPECIFICATION

		ML280 ELITE
General	Number of pins	9
	No. of multi-part forms	4 (one original + 3 copies)
Speed & throughput	Super speed (12cpi)	375cps
	High speed draft (10cpi)	333cps
	Utility (12cpi & 10cpi)	250cps
	Near letter quality (12cpi & 10cpi)	62.5cps
	Fastest print speed	375cps
Font & print features	Carriage width (10cpi)	80 columns
	Max. in compressed mode	160 columns
	Character pitch	10/12/15/17.1/20 pitch
	Graphics resolution	Up to 240 x 216 dpi
	Typeface & Font	Utility, High Speed, Draft, NLQ, Barcodes
	Typestyle	Emphasised, Enhanced, Double Width, Italics
Emulations & interfaces	Printer emulations	Epson FX, IBM Graphics or Oki MICROLINE
	Standard interfaces	Centronics Parallel/USB
	Optional interfaces	Serial RS 232C/RS 422/Current Loop
Paper-handling	Continuous paper	76.2 – 241.3mm
	First printable line (from top of page)	Cut sheet: 15mm Continuous: 16.9mm
	Standard	Autoload single sheet, Platen pin feed, Low tear-off, Paper end detection
	Optional	Roll paper stand, Pull tractor feed, Single bin sheet feeder
Physical	Dimensions (HxWxD)	80 x 360 x 275mm
	Weight	4.5kg
	Memory	128KB
	Noise level	51dB (quiet mode)
Power	Power requirements	220V - 240V AC
	Frequency	50/60Hz
Reliability	Print head life	200 million characters
	Ribbon life	3 million characters (re-inking cartridge)
Supplies life	MTBF	20,000 hours

OKI

Only use genuine Oki Original consumables to ensure the best quality and performance from your hardware. Non Oki Original products may damage your printer's performance and invalidate your warranty. Specifications subject to change without notice. All trademarks acknowledged.

*Oki, Network Solutions
for a Global Society*

OKI SYSTEMS (UK) LTD, PART OF OKI ELECTRIC

OKI SYSTEMS (UK) LTD,
550 DUNDEE ROAD,
SLOUGH, BERKSHIRE
SL1 4LE
UNITED KINGDOM

TEL: +44 (0)1753 819819
FAX: +44 (0)1753 819899

WWW.OKI.CO.UK



As an ENERGY STAR Partner, Oki Europe Ltd has determined that this product meets the ENERGY STAR guidelines for energy efficiency

09400944
© 2003 Oki Europe Ltd.